

# **Assembly Instructions**



(W x D x H): 2.20m x 2.20m x 2.49m Product Name: Broxton Gazebo

Pressure Treated products should not be treated with any other products for the first month.

### PLEASE KEEP THIS INSTRUCTION

Zest4Leisure
01352 752555 option 1 – sales@zest4leisure.co.uk

## **Broxton Gazebo Assembly Instructions**

Requires 2 person assembly.

Tools required: Corded / Cordless Drill, Pozi-drive Bit / Screwdriver, 3mm Drill Bit required in order for you to drill all screw holes before construction.

The colour version of this document can be downloaded from: www.zest4leisure.co.uk/downloads/category/C1

Broxton Gazebo Pack List		
Item	Description	Quantity
А	Side and Back Panel	3
В	Post	4
С	Ring Beam	4
D	Bracing	8
Е	Support Beam	1
F	Roof Support	1
G	Roof Panel	4
Н	Shelf Support Batten (Long x3, Medium x2, Short x1)	6
J	Back Shelf	1
К	Side Shelf (Left & Right)	2


Fixings		
	4 x 35mm Screws	26
	4 x 60mm Screws	95

### **Broxton Gazebo Assembly Instructions**

Requires 2 person assembly.

Tools required: Corded / Cordless Drill, Pozi-drive Bit / Screwdriver, 3mm Drill Bit required in order for you to drill all screw holes before construction.

The colour version of this document can be downloaded from: www.zest4leisure.co.uk/downloads/category/C1

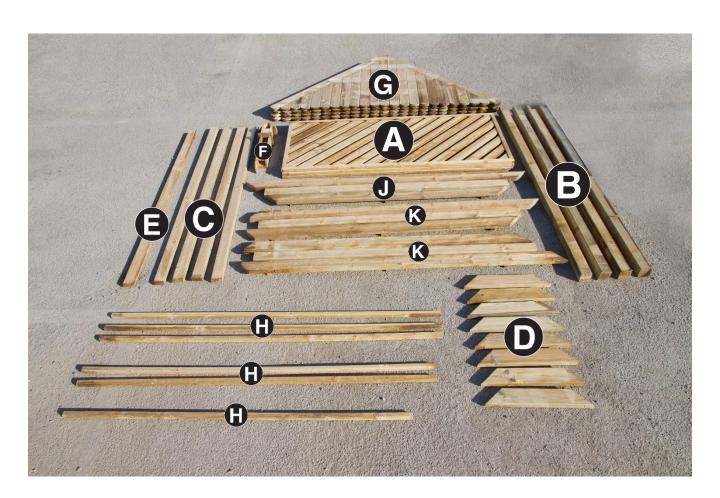


#### Please take a few moments to check all pack contents listed.

#### **Assembly requires 2 persons.**

Tools required: Corded/Cordless Drill, Pozi-drive Bit/Screwdriver, 3mm Drill Bit required in order for you to drill all screw holes before construction.

- 1. Attach Back Panel A to 2no Posts B at a nominal height of 150mm from base of posts, ensuring notches (cut outs) to posts are positioned externally and panel is flush with back of post using 6no 60mm screws (3 per post). (See Fig.1a) Attach Side Panels A to post/panel assembly using 6no 60mm screws (3 per post). (See Fig. 1b) Fix Side Panels A to remaining Posts B using 6no 60mm screws (3 per post) ensuring notches in posts are positioned externally. (See Fig. 1c)
- 2. Position and fix Ring Beams C as shown in Fig. 2 using 4no 60mm screws (2 per beam). Repeat procedure for remaining posts and beams using 12no 60mm screws (4 per post).
- 3. Fix 8no Bracings D to posts and ring beam assembly using 16no 60mm screws (2 per bracing). (See Fig. 3)
- Fix Support Beam E centrally along ring beam assembly as shown in Fig. 4a using 4no 60mm screws.
   Position Roof Support F to the centre of Support Beam E and fix using 2no 35mm screws. (See Fig. 4b)
- Locate Roof Panel G on to ring beam assembly and Roof Support F and fix in position using 6no 35mm screws (1 to Roof Support, 5 to ring beam).
   Repeat procedure for remaining 3 panels using 18no 35mm screws (6 per panel). (See Figs. 5b & 5c)
- 6. Attach Shelf Support Battens (Med.) internally to left and right hand posts using 4no 60mm screws (2 per batten). (See Fig. 6a)
  Attach Shelf Support Batten (Short) internally to top of back panel using 4no 60mm screws. (See Fig. 6b)
  Attach Shelf Support Battens (Long) externally as shown in Figs. 6c & 6d using 15no 60mm screws (5 per batten).
- 7. Position Back Shelf J and Side Shelves K onto shelf support battens and fix in position using 18no 60mm screws (6 per shelf). (See Fig. 7)

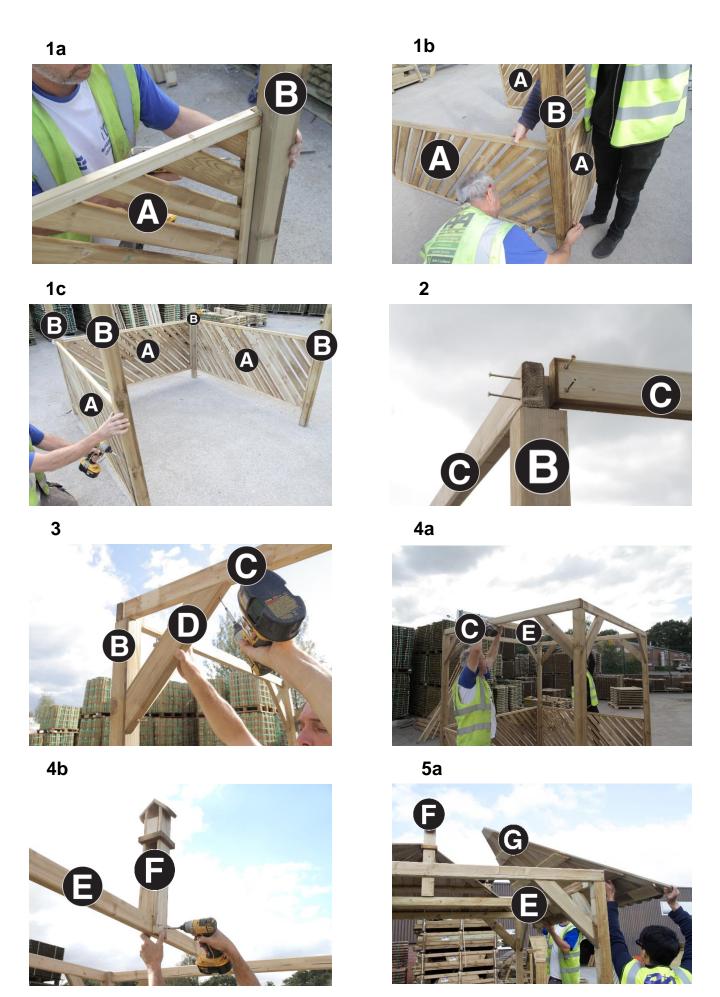

www.zest4leisure.co.uk

