



Assembly Instructions **Lily Relax Double Seat**

Code: 00451



(W x D x H) 1.75m x 0.92m x 0.92m

This product is made from pressure-treated timber. It should not be painted or coated with any other treatment until at least 6 months after purchase

PLEASE KEEP THESE INSTRUCTIONS


Lily Double Relax Seat Assembly Instructions

Requires 2 person assembly.

Tools required: Corded / Cordless Drill, Pozi-drive Bit / Screwdriver, 4mm Hex(Allen) Key,
Mallet required in order for you to drill all screw holes before construction.

Lily Double Relax Seat Pack List		
Item	Description	Quantity
A	Back Support Assembly	1
B	Seat Assembly	1
C	Back Assembly	1
D1/D2	Armrest/Leg Assembly	2
E	Leg	2
F	Upper Shelf Assembly	1
G	Lower Shelf Assembly	1

Fixings	Quantity
50mm Screws	18
Hex Bolts	12
'T' Nuts	12
Hex Screws	4

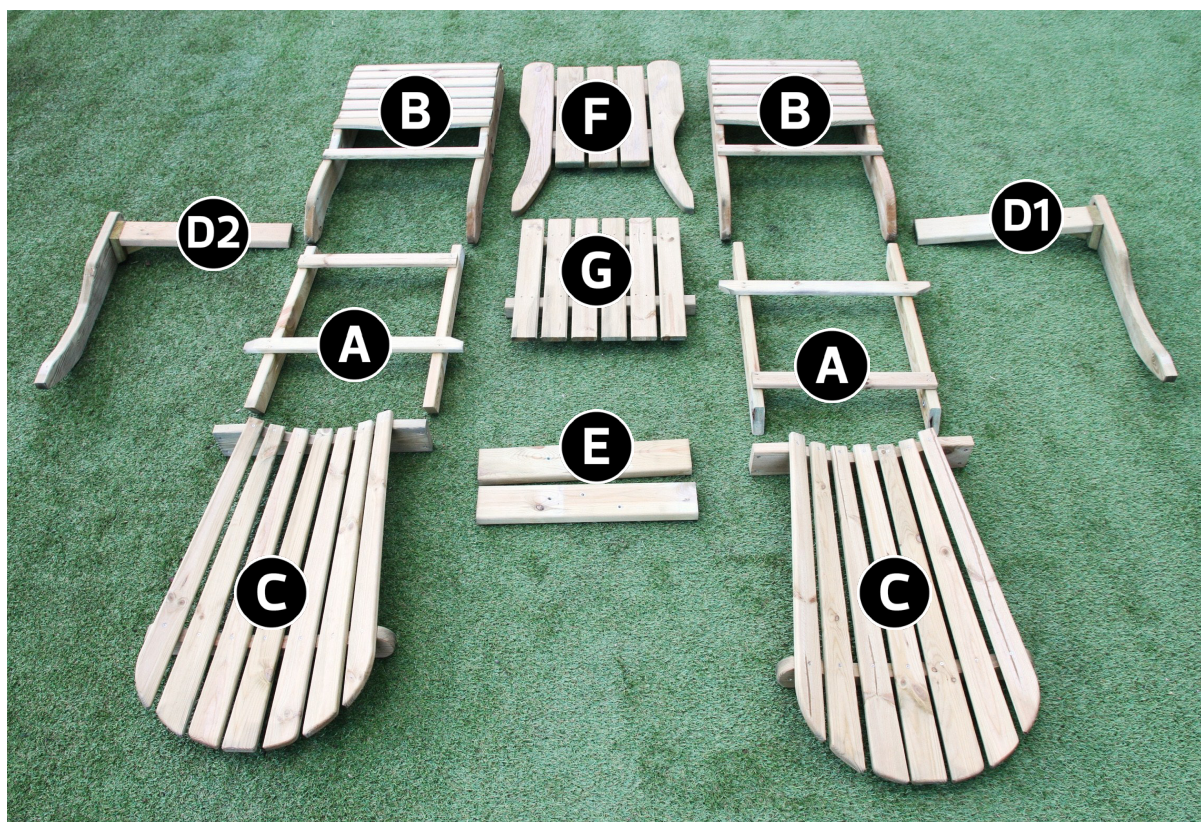

Requires 2 person assembly.

Tools required: Corded / Cordless Drill, Pozi-drive Bit / Screwdriver, 4mm Hex(Allen) Key,

Mallet required in order for you to drill all screw holes before construction.

1. Insert Back Assembly A between rear legs of Seat Assembly B, align bolt holes and insert 2no Hex Bolts and 'T' Nuts. See Figs. 1a, 1b & 1c.

Do not fully tighten at this stage.

2. Locate Back Assembly C as shown in Fig 2a and fix in position using 6no Screws. See Figs 2b & 2c.
3. Position Armrest/Leg Assembly D1 as shown in Fig.3a. Align bolt holes and insert 2no Hex Bolts and 'T' Nuts. See Fig. 3b. Do not fully tighten.

Attach Armrest/Leg Assembly D1 to Back Support Assembly A using 1no Screw. See Fig.3c.

Repeat stages 1–3 for remaining seat using Armrest/Leg Assembly D2.

4. Position Leg E as shown in Fig.4a and attach to Upper Shelf Assembly F using 1no. Screw. Fix remaining Leg E in corresponding position on Upper Shelf Assembly.

Ensuring correct orientation of Lower Shelf Assembly G, attach to both Legs E using 2no. Hex Screws. See Fig.4b.

5. Place shelf assembly between seat assemblies (D1 & D2 outermost) Fig.5a, locate screw/bolt holes and attach using 4no. Hex Bolts & 'T' Nuts to front (Fig.5b) and 2no Hex Screws to rear (Fig.5c).

Attach rear of Upper Shelf Assembly F to Back Support Assemblies A using 2no Screws as shown in Fig.5d.

Fully tighten all bolts at this stage.


Lily Double Relax Seat is now complete.

Please take a few moments to check all pack contents listed


Requires 2 person assembly

Tool required: Corded / Cordless Drill, Pozi-drive Bit / Screwdriver, (Hex Bit Included)

1a

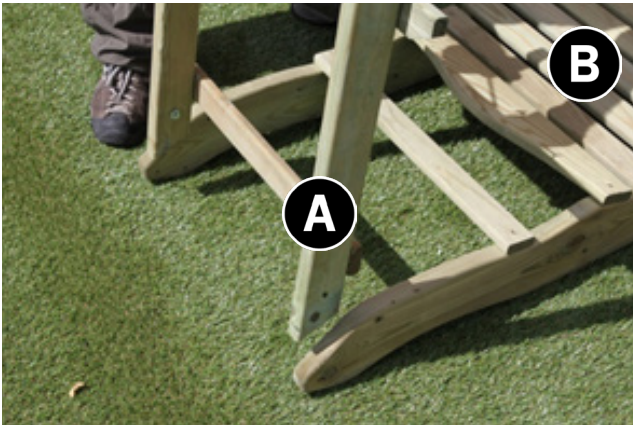


1b

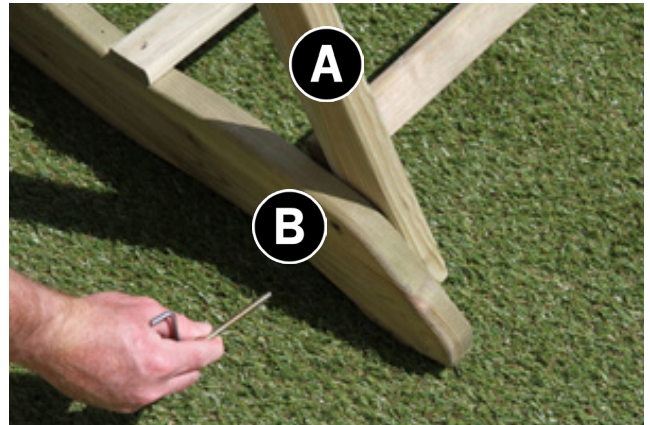


1c




2a

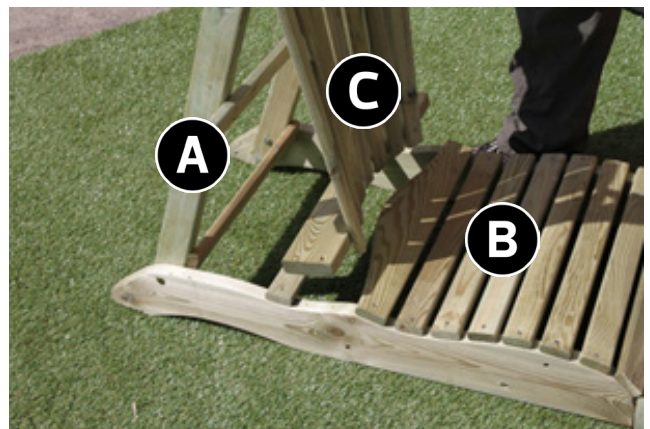


2b

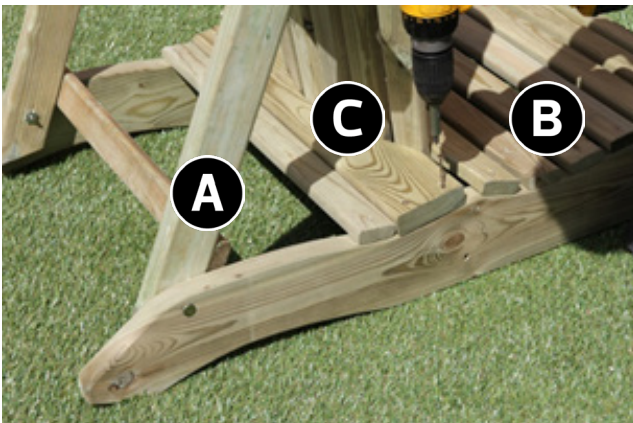


2c

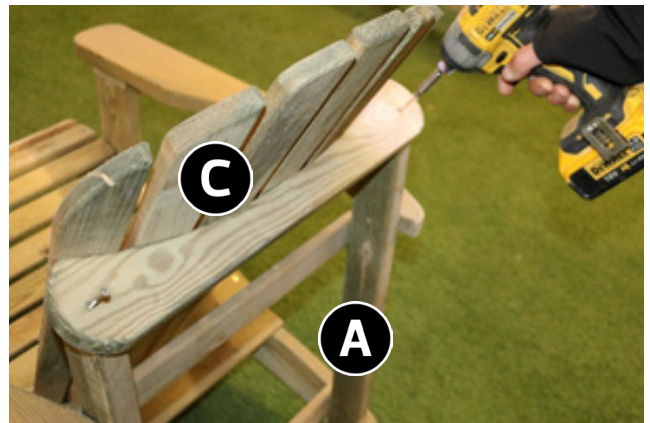

3a

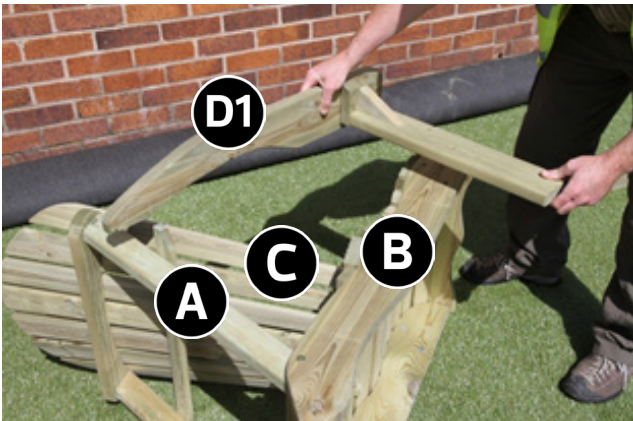

3b

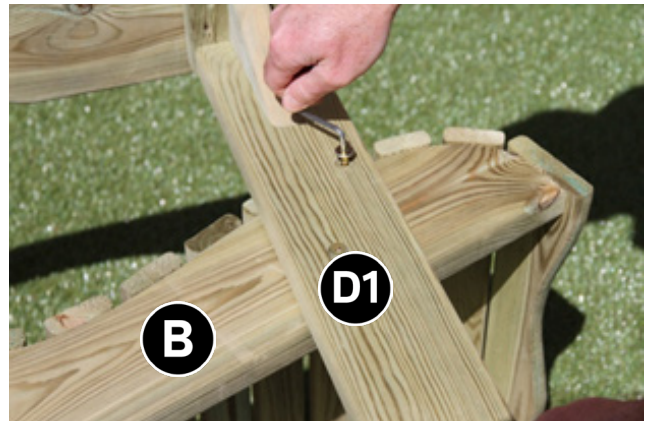


Please take a few moments to check all pack contents listed

Requires 2 person assembly

Tool required: Corded / Cordless Drill, Pozi-drive Bit / Screwdriver, (Hex Bit Included)

3c

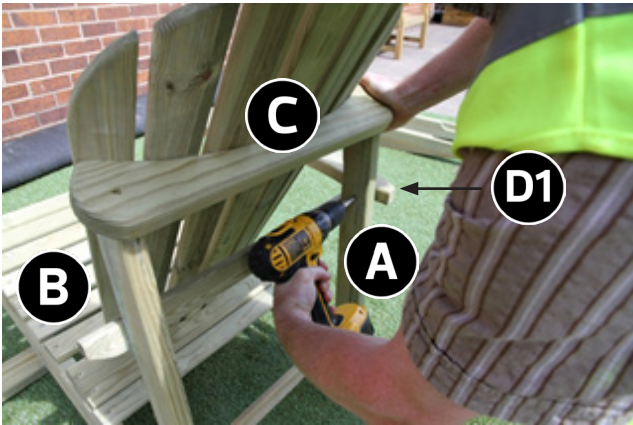


4a




4b




5a

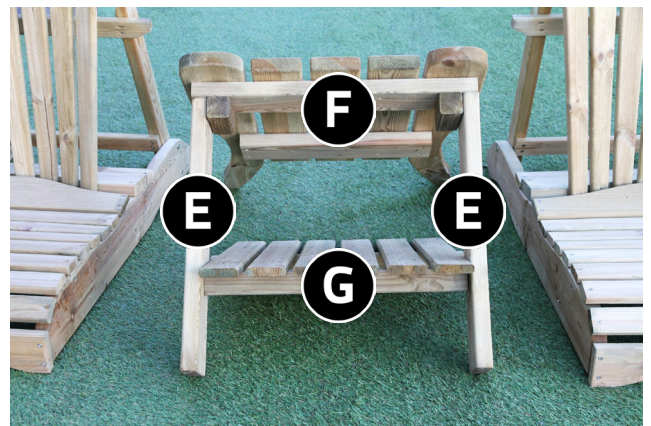

5b

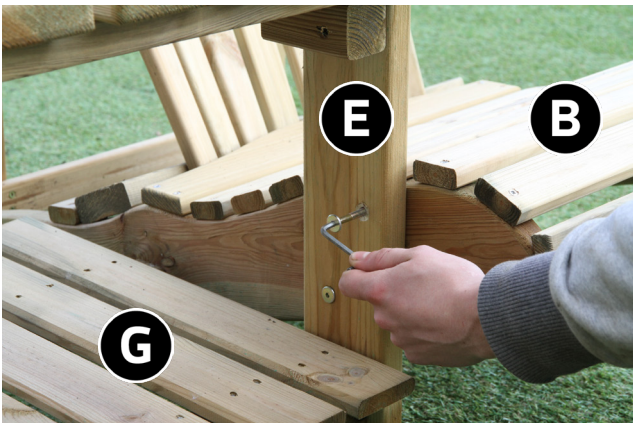

5c

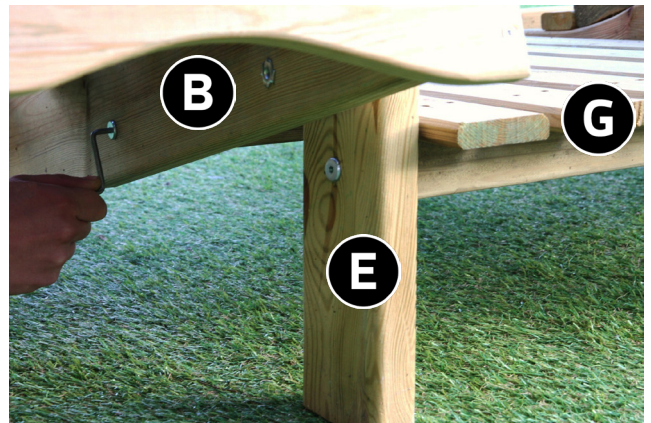

5d

