



## Assembly Instructions



(W x D x H) 1.80m x 0.90m x 0.30m  
Product Name: Aquatic Planter

Pressure Treated products should not be treated with any other products for the first month.

**PLEASE KEEP THESE INSTRUCTIONS**

Zest4Leisure  
01352 752555 option 1 – sales@zest4leisure.co.uk


# Aquatic Planter Assembly Instructions

Requires 2 person assembly.

Tools required: Corded / Cordless Drill, Pozi-drive Bit / Screwdriver, 3mm Drill Bit required in order for you to drill all screw holes before construction.

<b>Aquatic Planter Pack List</b>		
<b>Item</b>	<b>Description</b>	<b>Quantity</b>
A	End Panel	2
B	Side Panel	2
C	Long Capping Trim	2
D	Short Capping Trim	2
	Liner	1
	Base – Optional Extra	1

<b>Fixings</b>		
	60mm Screws	30
	70mm Screws – for Base Optional Extra	12

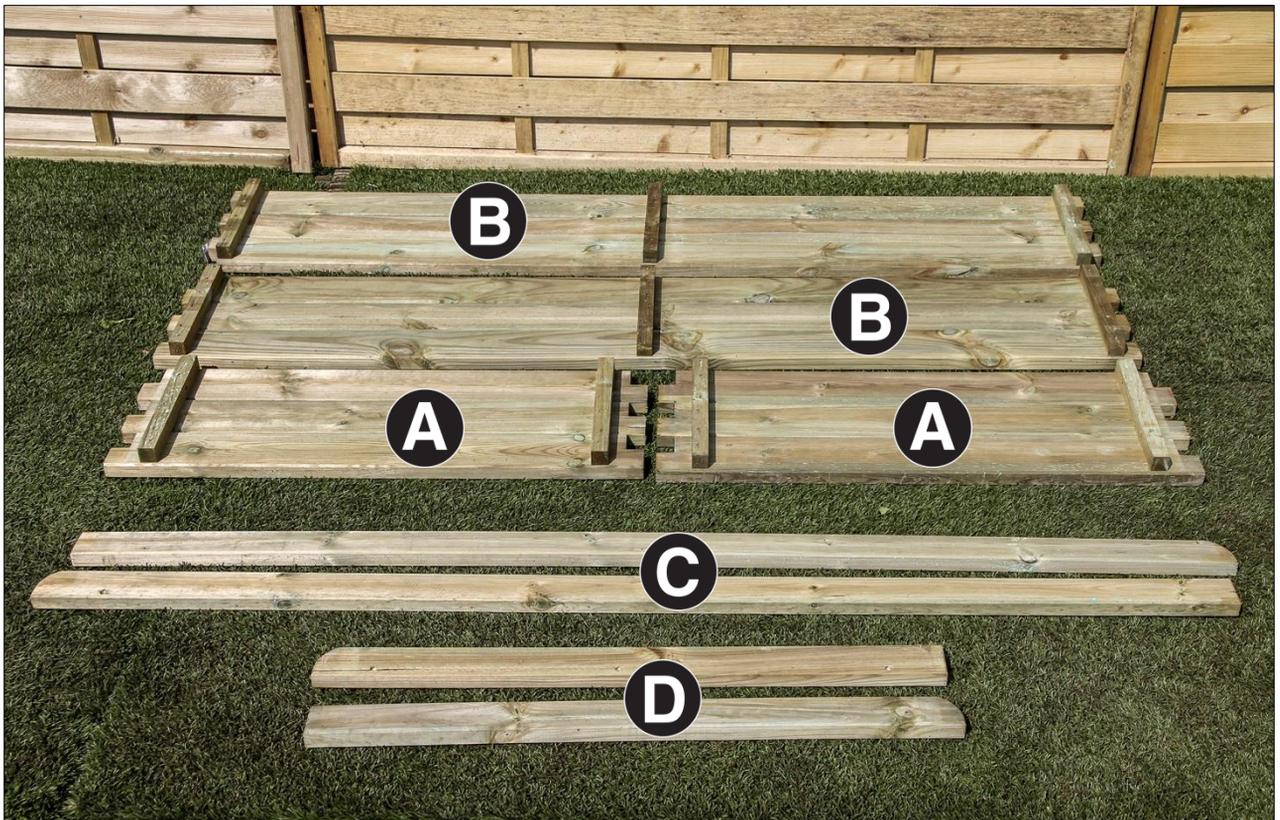

**Please take a few moments to check all pack contents listed.**

**Assembly requires 2 persons.**

**Tools required: Corded / Cordless Drill, Pozi-drive Bit / Screwdriver, 3mm Drill Bit required in order for you to drill all screw holes before construction.**

1. Interlock End Panels A with Side Panels B (Figs.1a & 1b) to form a rectangular planter.
2. Secure in position using 8no Screws - 2no per internal corner (Fig.2a) and 12no screws - 3no per external corner (Fig.2b).

#### **Planter Base – Optional Extra**


3. Invert the planter and place the base as shown in Fig.3a. Fix in position using 12no 70mm Screws – 2no per bearer (Fig.3b)
4. Place Liner into planter ensuring edges of liner are flush with outside edge of planter. Position Long Capping Trim C, ensuring internal face is flush with planter body and rounded corner outermost. Fix in position as shown in Fig.4a using 3no Screws.

Fix Short Capping Trim D as shown (circled) in Fig 4b using 2no Screws.


Similarly fix remaining capping trims.

**Aquatic Planter is now complete.**

1a

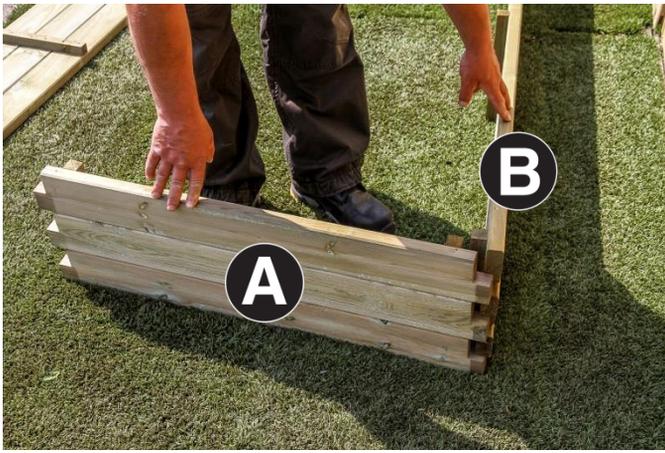

1b

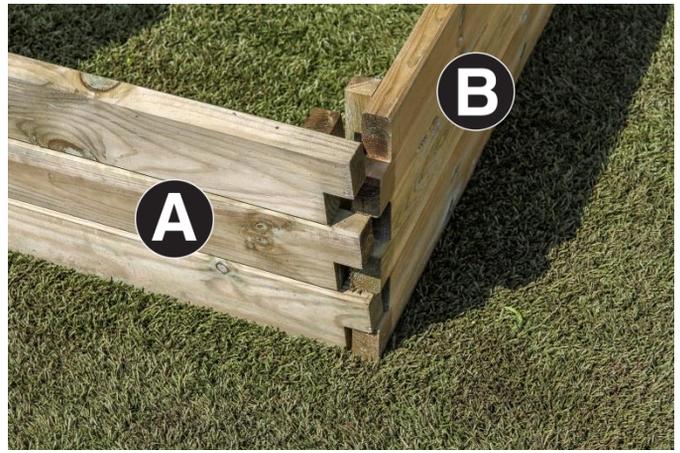

2a




2b



3a



Planter Base  
Optional Extra



3b



4a



4b

